

HD Zoom (2000mm)

D60x16.7SR4FE-ZP1C (AF and Anti-Vibration)

60x Applicable camera (model) 1 2/3 1/1.8 1/2 1/3 1/4 For Surveillance



HD
2MP

Day
Night

VISIBLE
LIGHT
CUT

Applicable to
1/1.8

Zoom
ZOOM

Motor Drive
MOTOR DRIVE

Telephoto Long Focal
TELE

Auto Focus
AF

Optical Anti-Vibration
OS-TECH

DC Auto Iris
DC

C Mount
C-mt

Metal Mount
METAL


ND Filter
ND

Extender
2x

PC Control
PC

Full Servo
SERVO

RoHS Compliant
RoHS

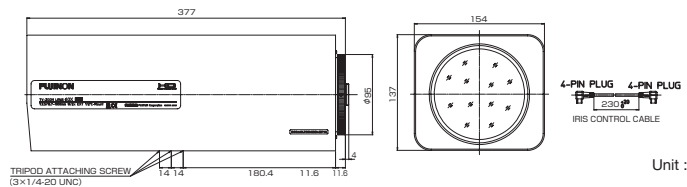

Unit : mm

D60x16.7SR4FE-ZP1C (AF and Anti-Vibration)				
Focal Length (mm)	1x		16.7 - 1000	
	2x		33.4 - 2000	
Iris Range	1x		F3.5 - F16	
	2x		F7.0 - F32	
Filter	ND (1/8, 1/64), Visible Light Cut			
Operation	Zoom	Servo Control		
	Focus	Servo Control		
	Iris	Auto(DC type) or Remote Available (with analog camera)		
AF	Available (with analog camera)			
Optical Anti-Vibration	Available			
Angle of View (H x V) (4:3) (mm)	1/1.8"	1x	WIDE	23°5' x 17°41'
			TELE	0°25' x 0°19'
		2x	WIDE	11°46' x 8°54'
			TELE	0°12' x 0°9'
	1/2"	1x	WIDE	20°53' x 15°55'
			TELE	0°22' x 0°17'
Angle of View (H x V) (16:9) (mm)	1/1.8"	1x	WIDE	24°56' x 14°34'
			TELE	0°27' x 0°15'
		2x	WIDE	12°47' x 7°18'
			TELE	0°24' x 0°14'
	1/2"	1x	WIDE	22°35' x 13°6'
			TELE	0°14' x 0°8'
Focus Range (From the Lens Front) (m)	1/1.8"	1x	WIDE	∞ - 5
			TELE	∞ - 5
		2x	WIDE	1975 x 1504
			TELE	35 x 27
Object Dimensions at M.O.D.(H x V) (4:3) (mm)	1/1.8"	1x	WIDE	998 x 753
			TELE	18 x 13
		2x	WIDE	1782 x 1353
			TELE	32 x 24
	1/2"	1x	WIDE	896 x 676
			TELE	16 x 12
Object Dimensions at M.O.D.(H x V) (16:9) (mm)	1/1.8"	1x	WIDE	2137 x 1237
			TELE	38 x 22
		2x	WIDE	1084 x 617
			TELE	19 x 11
	1/2"	1x	WIDE	1931 x 1111
			TELE	34 x 20
2x	1x	WIDE	974 x 553	
		TELE	17 x 10	
Back Focal Distance (in air) (mm)	24.85			
Exit Pupil Position (From Image Plane) (mm)	(1x) -448.80 (2x) -85.23			
Filter Thread (mm)	M112 x 0.75			
Mount	C			
Extender	2x			
Mass (kg)	6.9			
Standard Accessories	IRIS CONTROL CABLE			
Remarks				

